



Glo Brite® 7200 | 7300 Series P50 Exit Signs

Glo Brite® | ecōexit™
zero energy exit signs

Going green does not have to be expensive

Job Name:	_____
Type:	_____
Approved By:	_____
Distributor:	_____

FEATURES:

- Requires no additional electricity to operate
- Reliability
- Non-toxic, non-radioactive
- Low-cost, easy installation
- Designed for surface, flag or ceiling mounting
- Can be used for both high-level and low-level applications
- Requires virtually no maintenance, periodic inspections, for 25+ years
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Saves on energy costs

TECHNICAL INFORMATION:

Sizes: 7.5" x 13" x .075"
 Letter size: .8125" stroke with 6" height
 Background: Photoluminescent
 Illumination: High Visibility Green
 Visibility: 50 feet
 Directional: 2 included (Field Applied)
 Construction: Plastic photoluminescent panel/red or green lettering with black plastic frame
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL;
 Meets the (IBC) International Building Code. Meets NFPA Life Safety Code 101 and OSHA requirements; California State Fire Marshal listing #6200-1617:100; City of Los Angeles Research Report: RR 25531 (CSI #16530); Ontario Building Material Evaluation Commission Authorization Report BMEC #03-12-291; CCMC Evaluation Report CCMC 13211-R National Research Council Canada

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:


NO additional electrical or mechanical source required

INSTALLATION:

Surface mounted. Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.

APPLICATIONS:

Both high-level and low-level

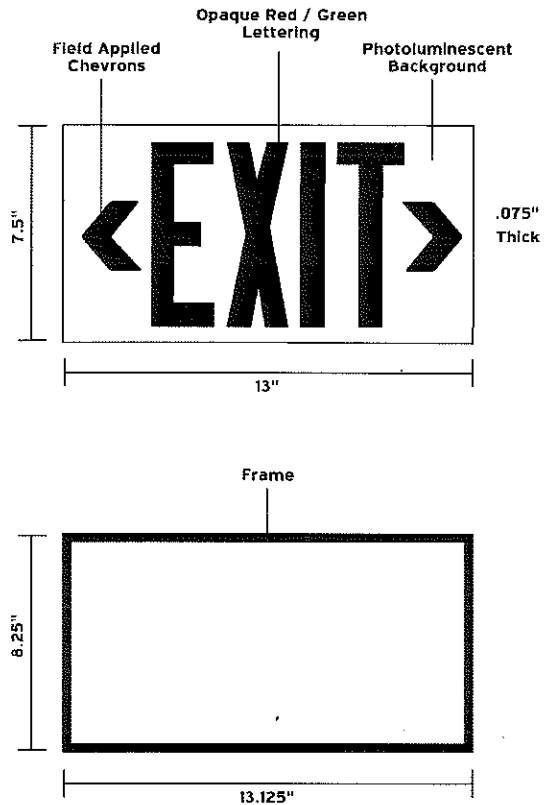

Catalog #	Letter Style	Letter Color	Chevrons
7	2 - Printed Letters	1 - Red	0 - With Chevrons
	3 - Reflective Letters	2 - Green	(field applied) included
7	_____	_____	0 (fill in for model #)

Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.

ANDERSON-BOLDS
 24050 COMMERCE PARK • CLEVELAND, OHIO 44122
 CLEVELAND • COLUMBUS • CINCINNATI
 (216) 360-9800 (614) 885-3933 (513) 528-5680
 www.anderson-bolds.com

